


SYN 100-XH-30

- Integrated breaker, easy to install
- 100% three-phase imbalance output
- Support for power backup, up to 40kW

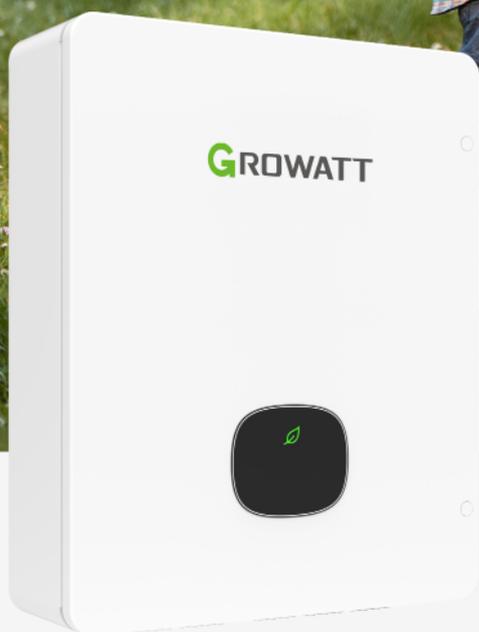

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

| Datasheet | | SYN 100-XH-30 |
|---|--|----------------------|
| Input from grid | | |
| Max. AC input overcurrent protection | | 125A |
| Max. continuous input current | | 90A |
| AC output voltage(nominal) | | 230V/400V (340-440V) |
| AC frequency(nominal) | | 50Hz/60Hz |
| AC frequency range | | 45-65Hz |
| Grid disconnection switchover time | | <500ms |
| Input from inverter | | |
| Rated AC power | | 40kW |
| Max. continuous input current@230v | | 58A |
| Rated AC power in continuous backup operation | | 40kW |
| Max. continuous input current in backup operation | | 58A |
| Peak AC power(<10s) in backup operation | | 44kW |
| Peak AC current(<10s) in backup operation | | 63A |
| Additional features | | |
| Communication | | RS485 |
| Manual control bypass switch | | Yes |
| Cooling | | Natural convection |
| Noise | | <30dB |
| Operating temperature range | | -40 °C--60 °C |
| Protection rating | | IP65 |
| Operating humidity(1h) | | Up to 100% |
| Maximum elevation | | 3000m |
| Mounting options | | Wall mounted |
| Weight | | 12kg |
| Dimensions(H/W/D) | | 365/450/123mm |