



### Eigenschaften

- patentierte Back-Contact-Cell-Technologie
- hergestellt aus hochwertigen Materialien
- 5% mehr Leistung gegenüber herkömmlichen Modulen
- sehr hoher Zellwirkungsgrad von über 24%
- universelles Design für private und kommerzielle Nutzung

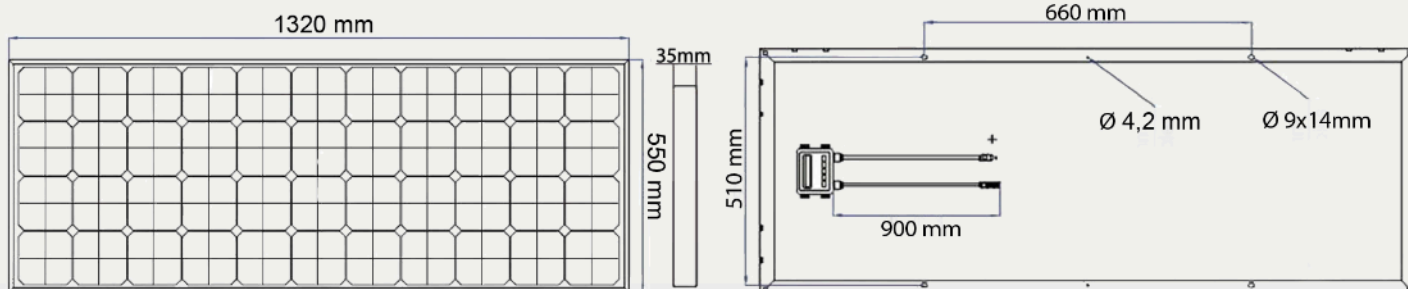

### Offgridtec SPR-150 150W 44V

Artikelnummer	3-01-001525
EAN	4250983241259
Hersteller-Teilenummer	010510
Systemspannung	12V* / 24V DC
Generatorleistung (Wp)	150 Wp
Modulspannung (Vmp)	44,0 V
max. Strom (Imp)	3,41 A
Leerlaufspannung (Voc)	51,79 V
Kurzschlussstrom (Isc)	3,69 A
max. System-Spannung	600V / DC
Zelltyp	Monokristallin
Umgebungstemperatur	-40°C - +85°C
Toleranz	±3%
Abmessungen (LxBxH)	1320 x 550 x 35 mm
Gewicht	9,37 kg
Zell-Wirkungsgrad	>24,0%

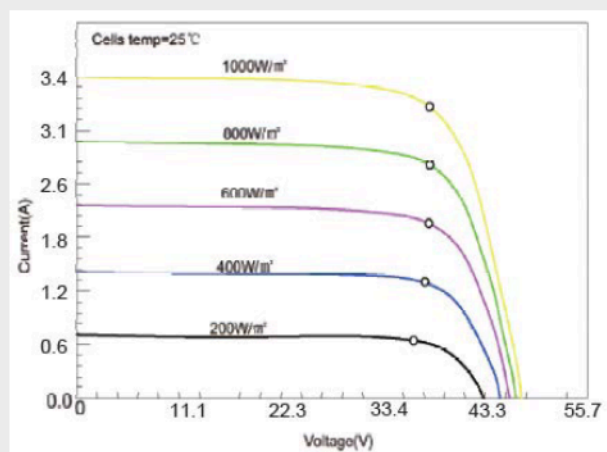


\*mit geeignetem MPPT-Laderegler




### Characteristics

- patented Back-Contact-Cell technology
- made from high quality materials
- 5% more power compared to conventional modules
- very high cell efficiency of over 24%
- universal design for private and commercial use

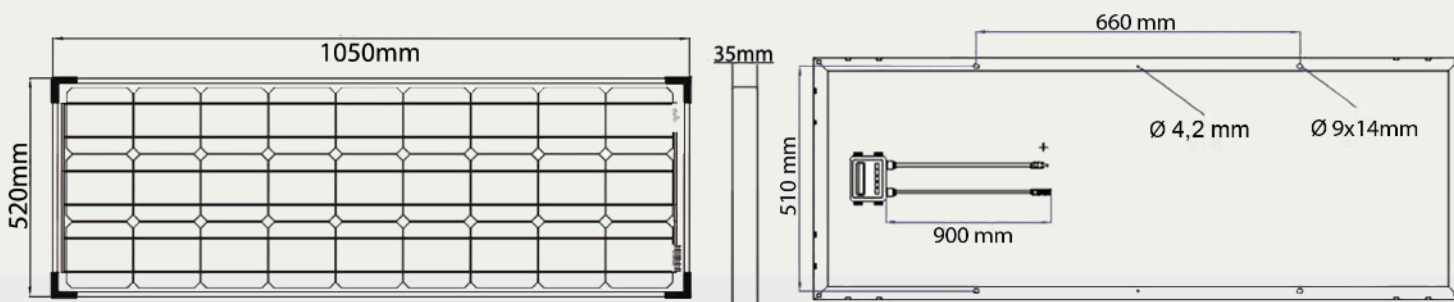

### Offgridtec SPR-150 150W 44V

Article Number	3-01-001525
EAN	4250983241259
Manufacturer part number	001525
System voltage	12V* / 24V DC
Generator output (Wp)	150 Wp
Module voltage (Vmp)	44,0 V
max. current (Imp)	3,41 A
Open circuit voltage (Voc)	51,79 V
Short circuit current (Isc)	3,69 A
Max. system voltage	600 V / DC
Cell type	monocrystalline
Ambient temperature	-40°C - +85°C
Tolerance	±3%
Dimensions (LxWxH)	1320 x 550 x 35 mm
Weight	9,37 kg
Cell efficiency	>24,0%

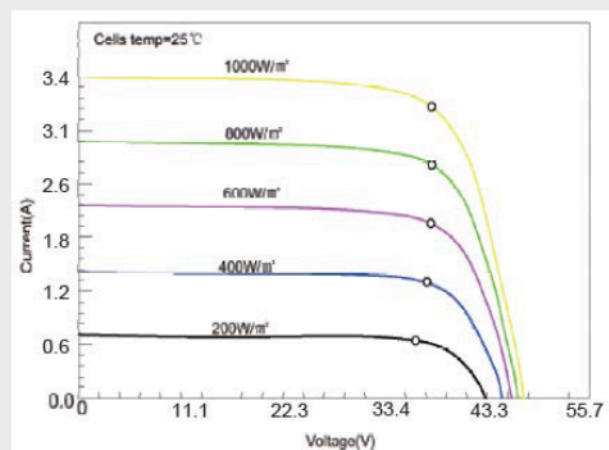

\*with suitable MPPT charge controller

