



Accessories

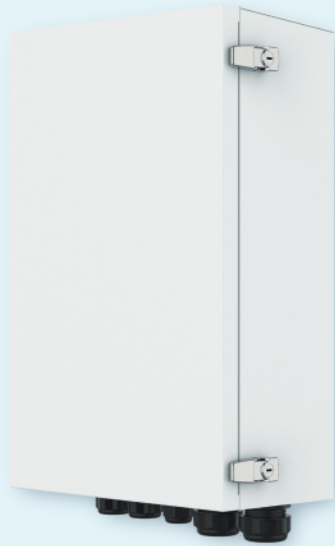

X1-Matebox G2

We get rid of complicated wiring work by laying all the wires in the Matebox. All you need to do is just to connect all the cables which are already well-sorted in the Matebox. This helps to save time and money.

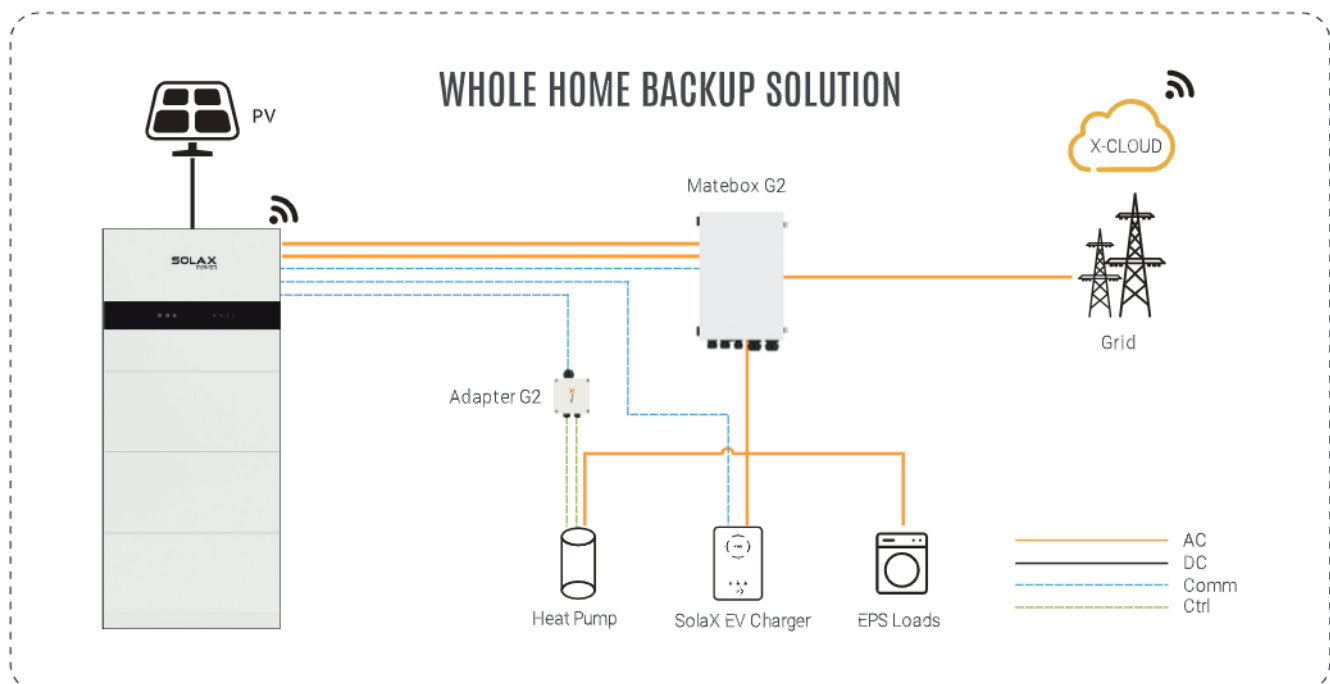

X1-Matebox G2

ON-GRID (INVERTER)	
Rated voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. apparent on-grid input/output power	8000 VA
Max. on-grid current	40 A
OFF-GRID (INVERTER)	
Rated voltage, frequency	230 Vac, 50 / 60 Hz
Max. apparent off-grid input/output power	8000 VA
Max. off-grid current	40 A
GRID (UTILITY)	
Rated grid voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. current	63 A (100 A for England)
LOAD	
Rated voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. current	63 A (100 A for England)
ENVIRONMENT LIMIT	
Ingress protection	IP65
Protection class	Class I
Operation temperature range	-25 ~ 60°C (> 45°C derating)
Storage temperature	-40 ~ 70°C
Relative humidity	0 ~ 100% RH (condensing)
Max. operation altitude	3000 m
Overvoltage category	III (AC)
OTHER	
Cooling concept	Natural cooling
DIMENSION AND WEIGHT	
Dimensions(WxHxD)	549 × 360 × 192 mm
Net weight	11 kg

