

# 正面

## Wi-Fi Smart Sprinkler Timer

### INSTRUCTION



Powered by **tuya** Intelligence

**offgridtec**


Thanks for Choosing our WiFi Smart Sprinkler Timer

### Specifications

Power: AA/LR6 1.5V \* 4( replaceable)  
 Pipe size: 3/4 inch  
 Thread type: G, NH(optional)  
 Standby consumption: 200uA  
 Bluetooth: Bluetooth5.0  
 Wireless standard: IEEE 802.11b/g/n/ax  
 Wireless frequency: 2.4GHz  
 Wireless distance: 45M  
 Waterproof level: IP65  
 Working pressure: 0.03MPa - 1MPa  
 Working temperature: -10°C - 60°C (14°F - 140°F)  
 Working humidity: 1% - 95%RH (non-condensing)  
 Size: 137mm X 126mm X 54mm

01


### Product Configuration

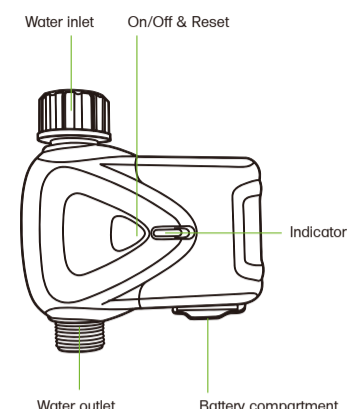

02

### Packaging accessories


- Sprinkler Timer x1
- Inlet adapter x1
- Outlet watering pipe adapter x1
- User manual x1

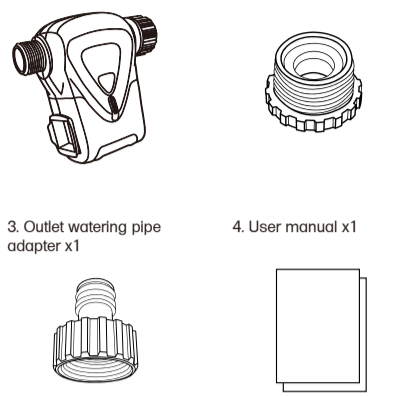

03

### Installation and use

#### 1. Overall schematic diagram

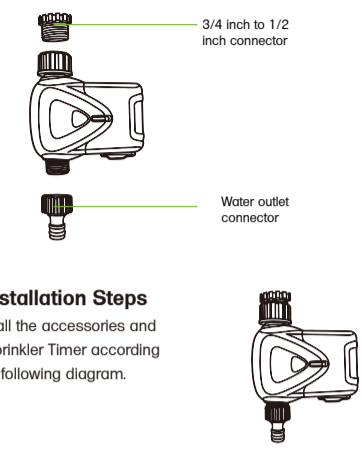


#### 2. Installation Steps

- Install the accessories and the Sprinkler Timer according to the following diagram.

04

- Close the water pipe valve and connect the equipment connected in step 1. to the water valve

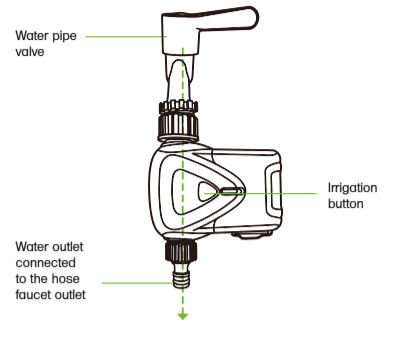


- After installation, open the water pipe valve and pair the equipment distribution network to the APP according to the instructions to use it

05

### 3. Battery replacement

Note:  
 1. Insert 4xAA standard alkaline batteries into the terminals Observe + position.  
 2. When inserting back into the battery compartment, pay attention to the direction of the shrapnel, and maintain the same orientation as the pouring switch button/indicator light.


- Remove the screw
- Take out the battery compartment
- Install 4xAA battery, replace the battery compartment.

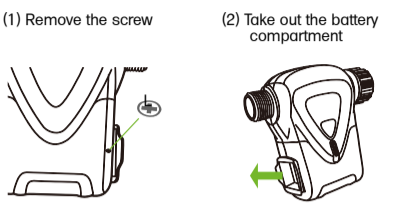

06

### 4. Installation cautions

- Pay attention to the direction of the water inlet/outlet during installation and do not reverse it
- Keep the product away from fire and heat sources. Do not expose products containing batteries to excessive heat (e.g., from storage in direct sunlight, fire, or the like).
- Do not place magnetic materials near the equipment.

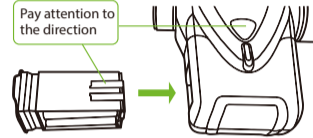

07


### LED State

Device Status	LED State
Pairing mode	LED flashes twice per second
Reset	Long press reset key for 6 seconds
Low power mode	LED flashes 3 times

08


### Get Started

- Download APP  
 Android system: Download the "Smart Life" APP at Google Play;  
 IOS system: Download the "Smart Life" APP from the Apple Store.

09


- Register and Login  
 2.1 Launch the "Smart life" app.  
 2.2 To register your mobile phone number or email address, create a password, then login to the app.  
 2.3 Login if you have an account already.

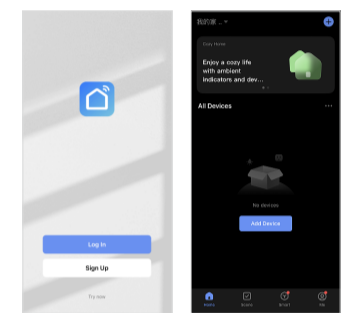

10


- Add Devices  
 The device is powered on in Wi-Fi mode by default. If the indicator is off, press and hold the reset button for 6 seconds, and then select the corresponding indicator mode to add the device.

- Select the device type to add  
 Note: All Wi-Fi products can be added by selecting any Wi-Fi option. The device only supports 2.4GHz Wi-Fi signals.

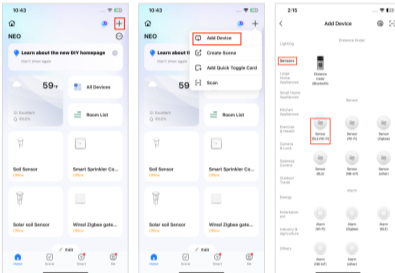


11

- Smart Wi-Fi Mode  
 Press the reset button until the device indicator flashes quickly, then add it (please follow the APP prompts)

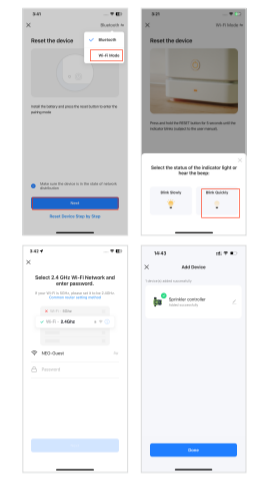

12

- AP compatible Mode  
 Press the reset button until the device indicator flashes slowly, then add it (please follow the APP prompts)

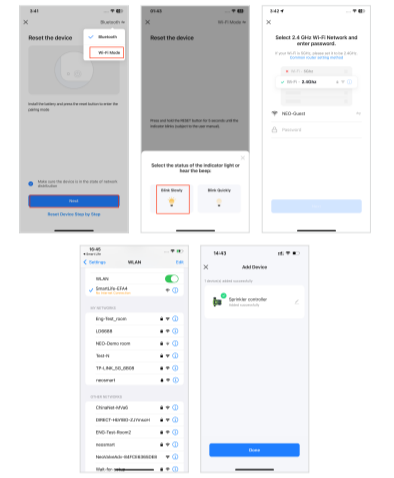


13

# 背面


### 3.2 Bluetooth Mode

Method 1: Turn on Bluetooth on your phone and add the device via Bluetooth mode

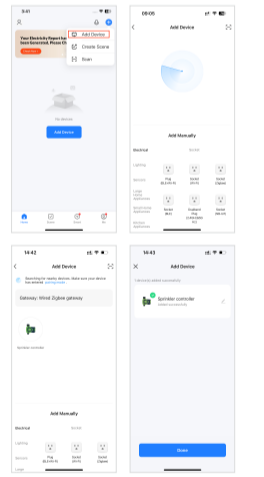

14


Method 2: After turning on Bluetooth, enter the APP and the device will be automatically searched by Bluetooth, then click Add

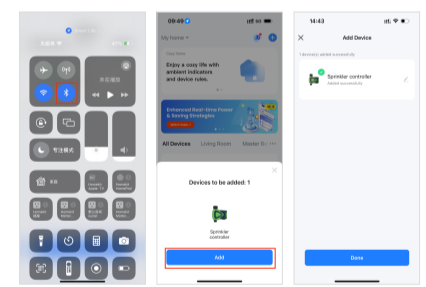

15


### Functions and Settings

#### App Main interface

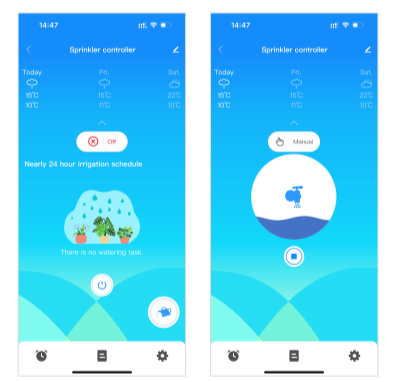


16

- Irrigation immediately

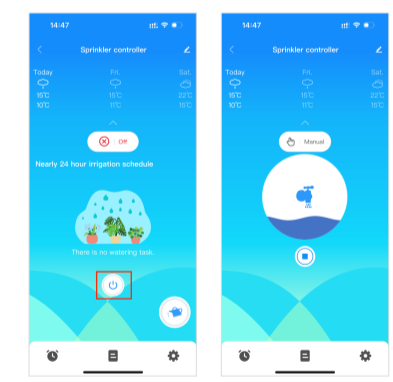


17

- Irrigation Switch  
 Countdown Watering: Maximum duration 4 hours

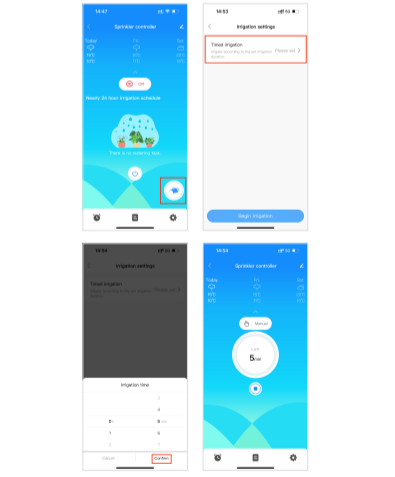

18

- Regular watering  
 Regular watering

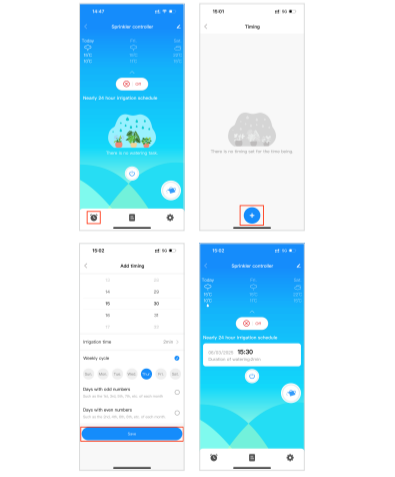


19

- Irrigation Records




20

- Setting  
 (1) Battery level

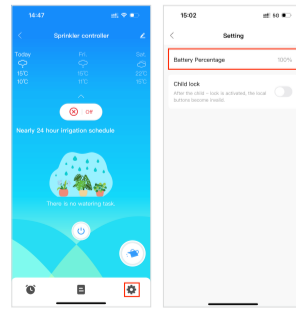

21


- Child lock  
 Local button switch is not supported after opening the child lock. But when the water valve is open, open the child lock and quickly press it three times to close the water valve

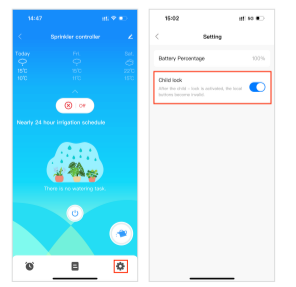


22

#### Other Function

- Scene linkage  
 Example: When the soil sensor detects that the humidity is below 30%, it will activate the irrigation system and count down for 5 minutes

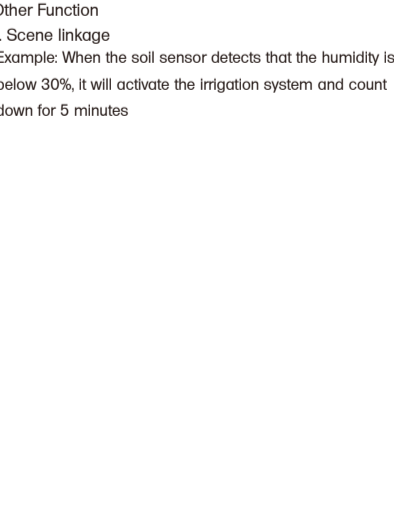


23

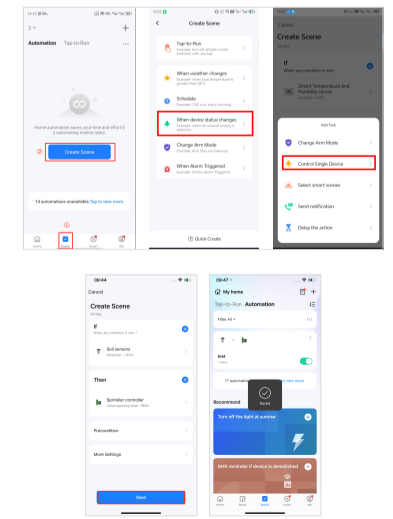


24

- Sharing device

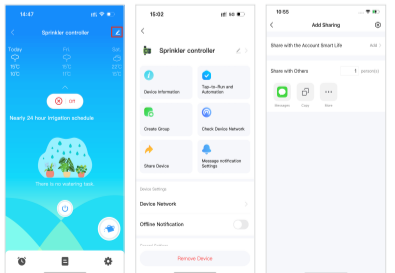

25

- Delete  
 After deleting and cleaning device data through the app, add the device again to clear all device records and restore default settings

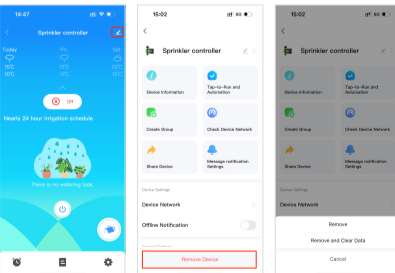

26

Due to the app update, the above interface is for reference only